
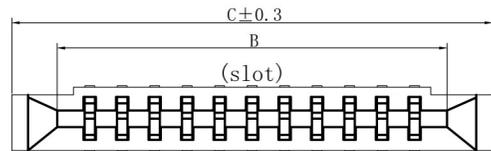


REV. 版本	MODIFICATION. 变更内容	DRAWN/DATE 设计/日期


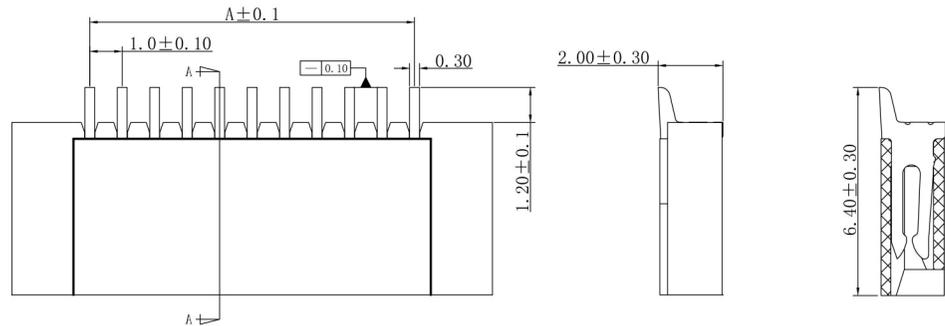


新料号 1028B0-***-***


不带焊片

PIN数

1: LCP 2: PA9T
D: 袋装 G: 管装 P: 盘装
1: 雾锡 2: 亮锡 3: 镀金

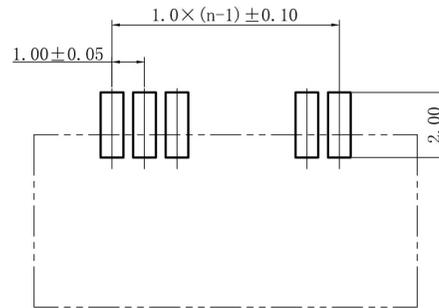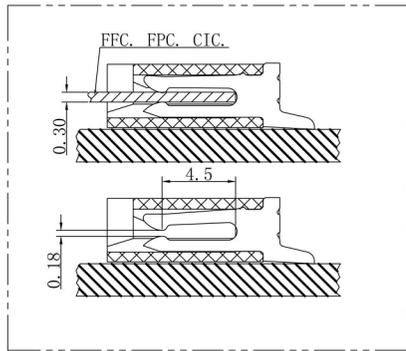

PC BOARD LAYOUT

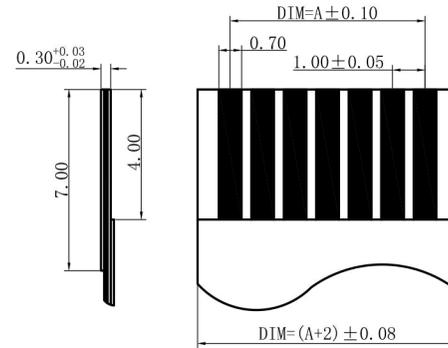

NO. of Contacts (n)	Dimensions		
	A	B	C
004	3.0	5.07	7.8
005	4.0	6.07	8.8
006	5.0	7.07	9.8
007	6.0	8.07	10.8
008	7.0	9.07	11.8
009	8.0	10.07	12.8
010	9.0	11.07	13.8
011	10.0	12.07	14.8
012	11.0	13.07	15.8
013	12.0	14.07	16.8
014	13.0	15.07	17.8
015	14.0	16.07	18.8
016	15.0	17.07	19.8
017	16.0	18.07	20.8
018	17.0	19.07	21.8
019	18.0	20.07	22.8
020	19.0	21.07	23.8
021	20.0	22.07	24.8
022	21.0	23.07	25.8
023	22.0	24.07	26.8
024	23.0	25.07	27.8
025	24.0	26.07	28.8
026	25.0	27.07	29.8
027	26.0	28.07	30.8
028	27.0	29.07	31.8
029	28.0	30.07	32.8
030	29.0	31.07	33.8
031	30.0	32.07	34.8
032	31.0	33.07	35.8

Electrical

Voltage: 50 V AC(rms)/DC
 Current: 1A AC(rms)/DC
 Contact Resistance: 40 mΩ max(initial)
 Dielectric Withstanding Voltage: 200 V AC/rms
 Insulation Resistance: 800 MΩ min
 Operating Temp: -40°C ~ +85°C

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN. 安路路 设计 2011. 6. 23	劳氏科技	
X. ±0.30 .X ±0.25 .XX ±0.15 .XXX ±0.10	X° ±5.0° .X° ±3.0° .XX° ±2.0°	CHECKED. 审核		
UNIT: mm	SCALE 1:1	APPROVED. 核准	PART NUMBER. 料号 1028B0-***-***	
A4	SHEET: 1 of 1		MDRAWING NO. 图号 1028B0	REV. A0